

Antibody Design

Samuel Schmitz

11/04/16

Samuel.Schmitz@vanderbilt.edu

Slides/Exercise by Alex Sevy:

alexander.m.sevy@vanderbilt.edu

Overview

Introduction to Protein Design

How it works:

The Packer

Resfiles


Overview of the Tutorial:

Input files

Protocol

Analysis

Protein Design is the Inverse Protein Folding Problem

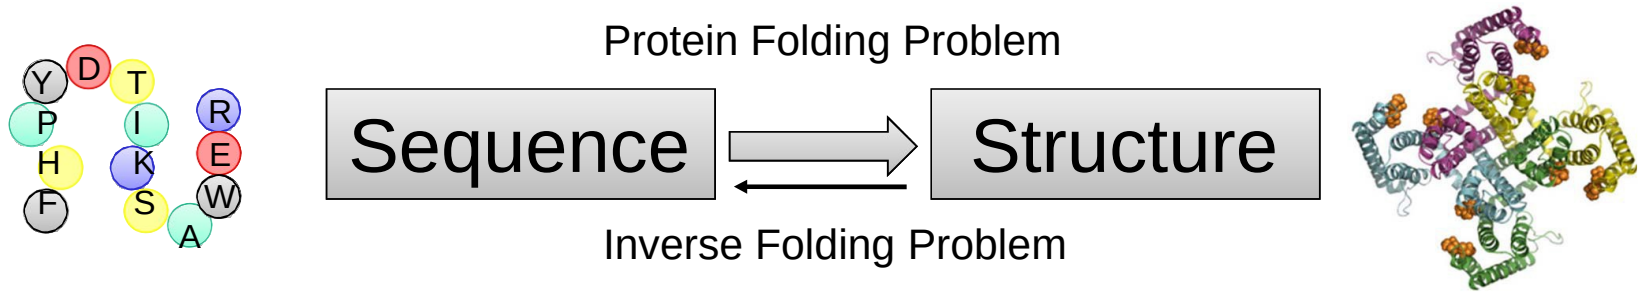


Given a protein fold – which primary sequence(s) can fold into it?

Protein Design Uses the Rosetta Energy Function and Local Rotamer Libraries

Local Rotamer Bias


Approximate interactions within sidechain using the distribution of sidechain conformations (rotamers) seen in known protein structures

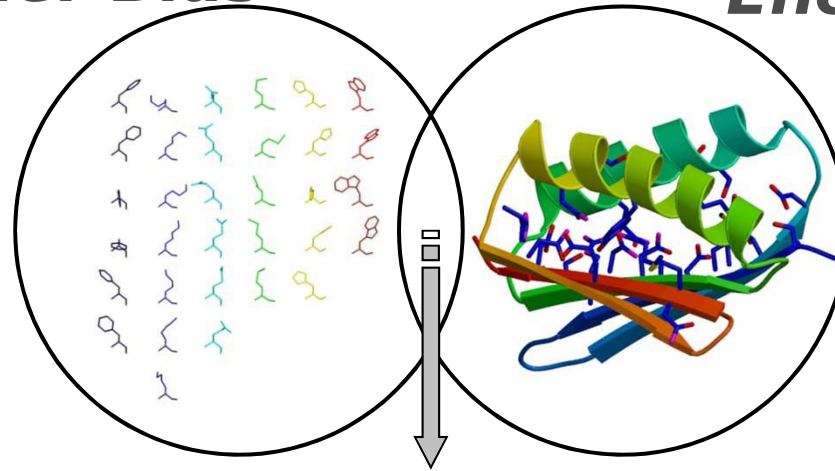

Energy function

Statistically derived potential function

- VDW interaction
- solvation
- hydrogen bonding potential
- pair wise interactions
- rotamer probability


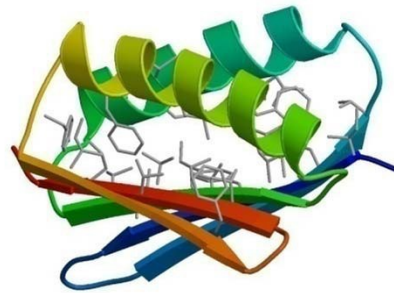


Simulated Annealing Monte Carlo optimization

How Rosetta Design works...

Side chain rotamer optimization

- Rotamer = **rotational isomer**
- Sampling all chi angles is computationally expensive
- Rotamers fall into discrete bins – can simplify this with a rotamer library

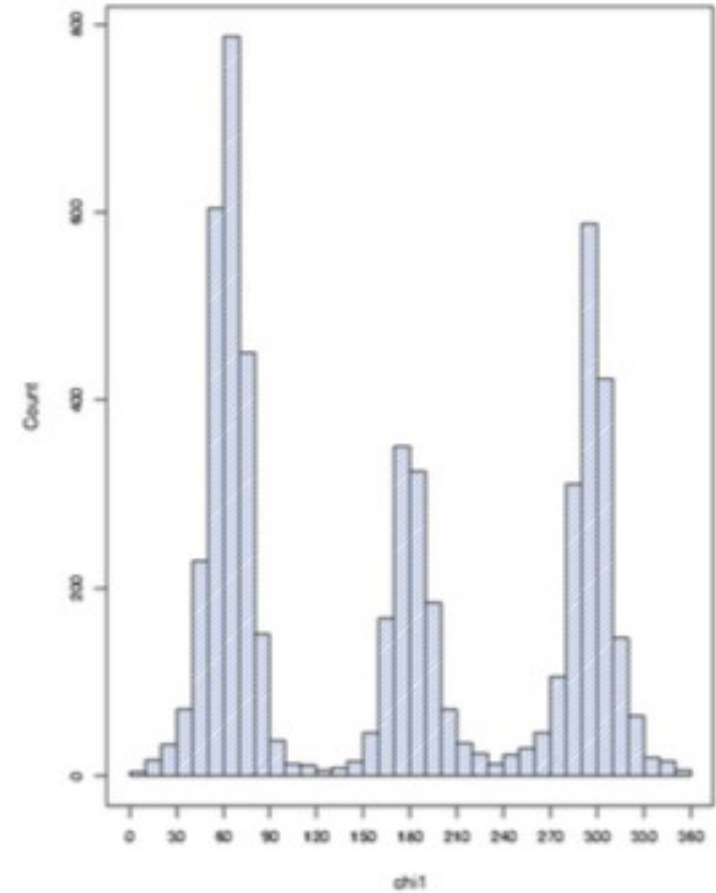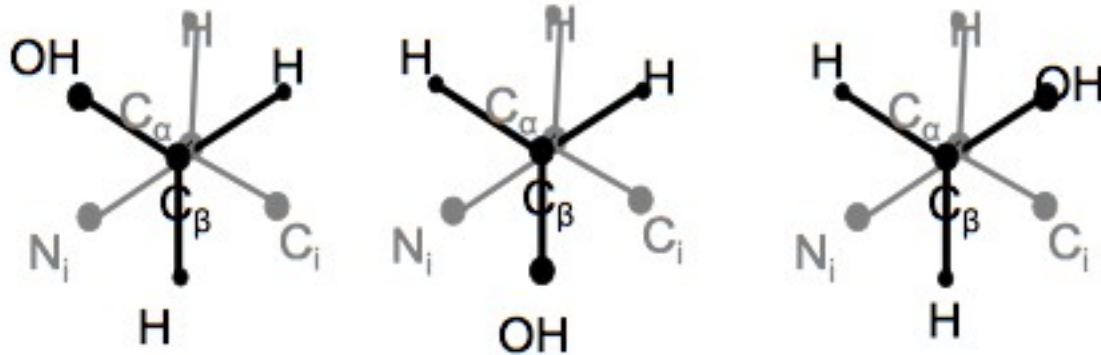

Adapted from J. Meiler

“The Packer”

In general, the purpose is to optimize rotamers on a fixed backbone.

Native (repack)

All Amino Acids (design)

Specified Amino Acids (guided design)

Steps of the packer:

1. Detect neighbors
2. Build rotamers
3. Calculate energies
4. Simulated annealing/MC Accept



The Packer-What it's Actually Doing

1. Random rotamer substitution
 - Set of rotamers to be considered are specified
2. Evaluate energy
3. Accept/Reject
 - Metropolis criterion
 - Simulated annealing from high to low temperature
4. Return best energy

How to Control the Packer...

The Residue File Guides Design

```
ALLAA #allow all 20 amino
ALLAAwc #allow all 20 amino(default)
ALLAAxc #allow all amino acids except cysteine
POLAR #allow only canonical polar amino acids
APOLAR #allow only canonical non-polar amino acids
NOTAA #disallow only the specified amino acids
PIKAA #allow only the specified amino acids
NATAA #allow only the native amino acid (repack)
NATRO #preserve input rotamer
EMPTY #disallow all canonical amino acids
NC <ResidueTypeName> #allow the specific non canonical residue
```

You can also combine commands (see tutorial).

```
25 A POLAR NOTAA K
```

When on separate lines (say at first a range, then at specific residues):

```
5-20 A ALLAA
15 A PIKAA Y
```

Residue 15 on chain A will only sample Y, whereas 5-14 and 16-20 will sample all

https://www.rosettacommons.org/docs/wiki/rosetta_basics/file_types/resfiles

Basic Format of Residue Files

```
<Header> #instructions for all positions not specified in body
#The header can also use commands such as EX 1, EX 2,
#and USE_INPUT_SC to apply to all positions not specified below
START #keyword
<Body> #instructions for specific chains and identifiers
<PDBNUM> <CHAIN> <COMMANDS>
#Basic format for lines in body
* <CHAIN> <COMMANDS>
#used to specify a command for an entire chain
```

For example, a resfile that does nothing:

```
NATRO #keeps all input rotamers (and hence identity)
START
```

Residue File Example

Resfile that designs everything:

```
ALLAA  
START
```

Resfile that only repacks chain H:

```
NATRO  
START  
* H NATAA
```

Resfile that does nothing:

```
NATRO #keeps all input rotamers (and hence identity)  
START
```

What will the Packer do?

NATRO

START

* A NATAA

What will the Packer do?

NATRO

EX 1

START

30 A PIKAA FY

20-35 A ALLAAxc


Tutorial Overview – Antibody design in Rosetta

Antibody single-state design

Antibody single-state design


Also known as redesign, computational affinity maturation

Goal: take an existing antibody-antigen complex and optimize the antibody sequence for tighter binding

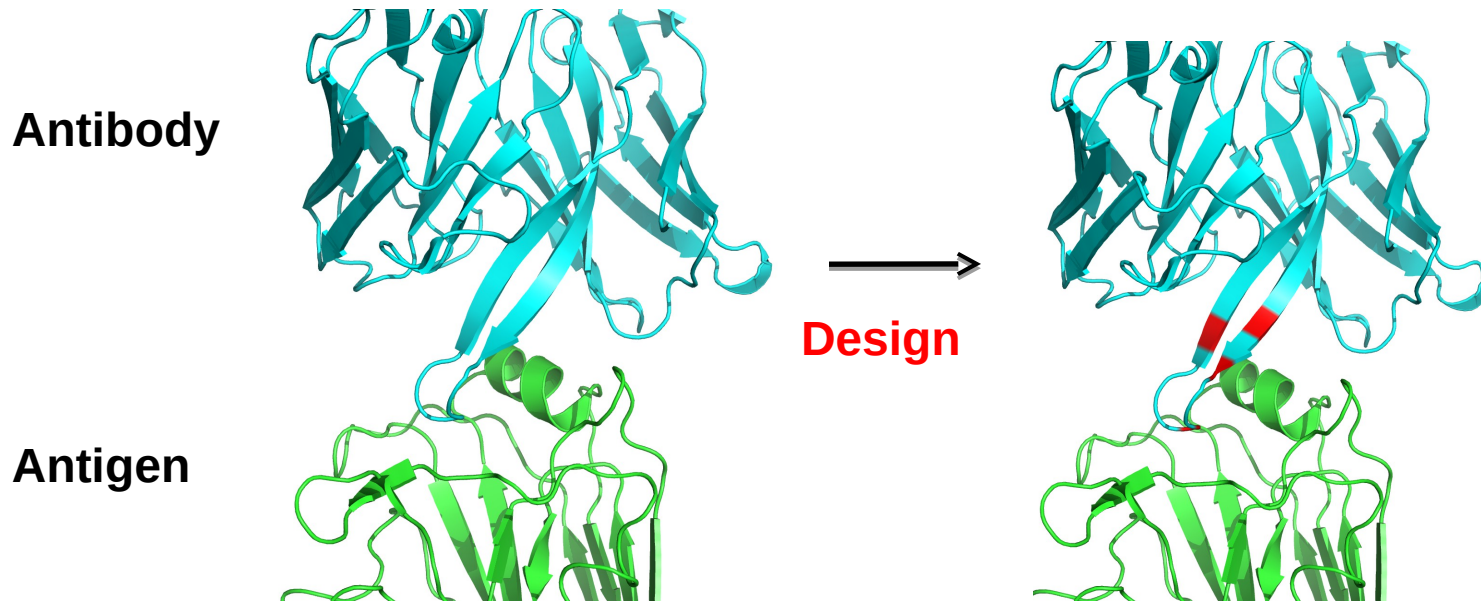

PDB ID 4yk4


Single-state design protocol overview

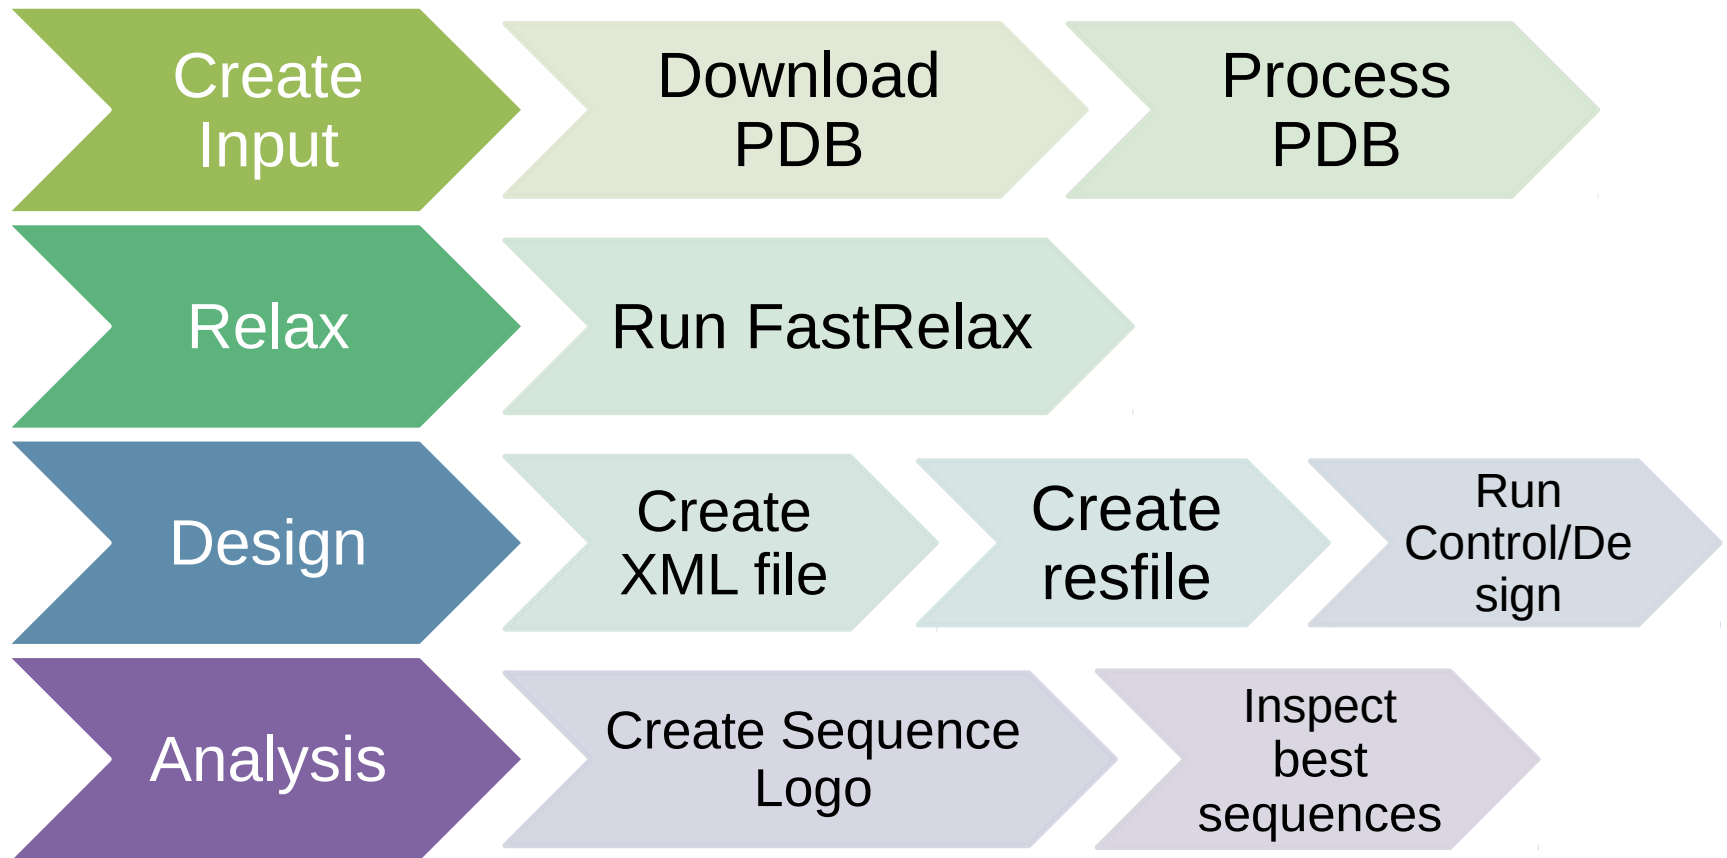

FastRelax

FastRelax is designed to optimize the protein backbone/side chains to model at an energy minimum

Helps relieve clashes that may introduce artifacts into design

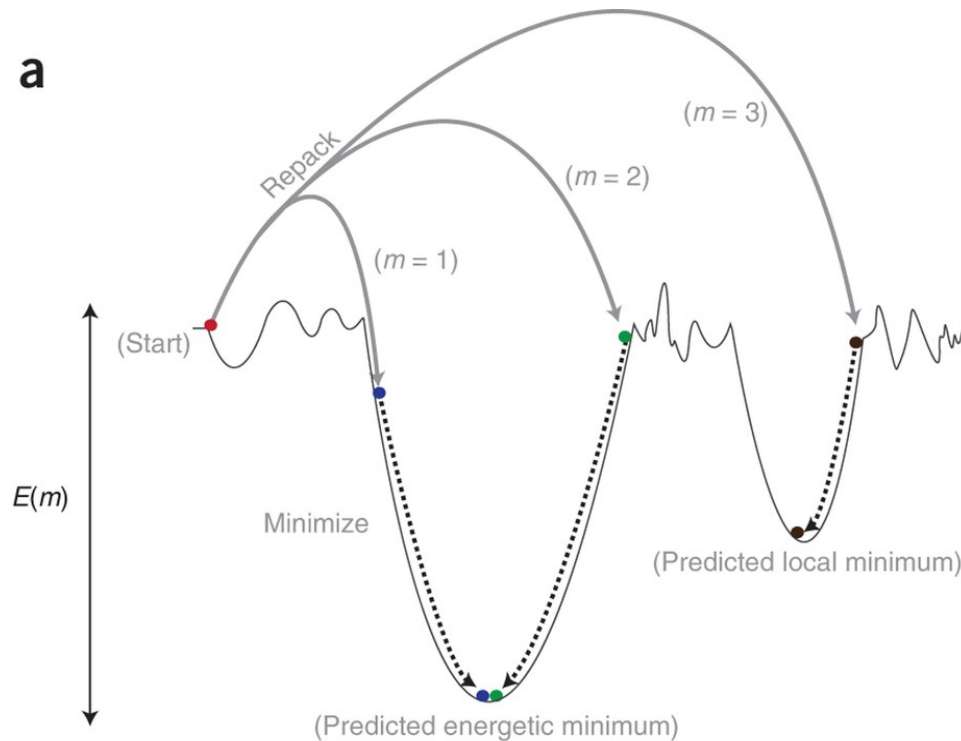

FastRelax

input_files/relax.command:

```
~/rosetta_workshop/rosetta/main/source/bin/relax.default.linuxgccrelease @relax.options -s 4HKX_renum.pdb
```

input_files/relax.options:

```
-linmem_ig 100 # specify memory to store rotamer pair interactions  
-use_input_sc      # Include rotamers from the input structure  
-nstruct 1         # Generate 1 model  
-relax:fast        # Do a small cycle number fast relax  
-relax:constrain_relax_to_start_coords # Add coordinate constraints  
to backbone heavy atoms, based on the input structure.  
-scorefile relax.fasc
```

Single state design

Please open input_files/design.xml

Where should you start looking?

```
<PROTOCOLS>
```

```
  Run the design protocol
```

```
    <Add mover=design />
```

```
  Calculate interface metrics for the final sequence
```

```
    <Add mover=analyze />
```

```
</PROTOCOLS>
```

Design movers

Design mover:

```
<PackRotamersMover name=design scorefxn=talaris2013  
task_operations=ifcl,rrf />
```

Task Operations:

Include rotamer options from the command line

```
<InitializeFromCommandline name=ifcl />
```

Design and repack residues based on resfile

```
<ReadResfile name=rrf filename=4HKX.resfile/>
```

Design control

Important to see how much improvement designs have over a nondesigned model

Please open `input_files/design_control.xml`

Design mover:

```
<PackRotamersMover name=design scorefxn=talaris2013  
task_operations=ifcl,rrf />
```

Task Operations:

Include rotamer options from the command line
`<InitializeFromCommandline name=ifcl />`

Design and repack residues based on resfile
`<ReadResfile name=rrf filename=4HKX_control.resfile/>`

Making resfiles

Use the python script located in
`scripts/define_interface.py`

Calculates residues on each side of the interface
using a side chain cutoff (default 5 Å)

If any atom on a residue is within 5 Å of any atom
on a residue on the opposing chain – it's
considered to be an interface residue

Making resfiles

--side1=SIDE1 the chains that make up one side of the interface (as a string, e.g. 'AB')

--side2=SIDE2 the chains that make up the other side of the interface (as a string, e.g. 'CD')

--nearby_atom_cutoff=NEARBY_ATOM_CUTOFF

 SC distance cutoff to define a residue as part of the interface. If any SC atom from a residue on one side is within this cutoff of a residue on the other side it's considered to be in the interface.

Default=5.0

--output=OUTPUT Output name for resfile

--design-side=DESIGN_SIDE

 Side of interface to design - either 1 or 2. Defaults to 1.

--native Just repack the residues on the side flagged "design side"

--repack Repack side of the interface not being designed

Analysis metrics

Total score: score of the entire complex

Interface score: score of residues that are at the interface

Binding energy (ddG, dG_separated): difference in energy between the bound and unbound partners

Binding density (dG_separated/dSASAx100): ddG divided by the buried surface area. Prevents a low binding energy by increasing buried surface area.

Analysis movers

```
<InterfaceAnalyzerMover name=analyze scorefxn=talaris2013  
packstat=0 pack_input=0 pack_separated=1 fixedchains=H,L />
```

packstat: activates packstat calculation; can be slow so it defaults to off

fixedchains: comma-delimited list of chain ids to define a group in the interface.

pack_separated: repack the exposed interfaces when calculating binding energy? Usually a good idea.

pack_input: prepack before separating chains when calculating binding energy? Useful if these are non-Rosetta inputs

Sequence logo

Useful to quickly see which residues are being designed,
and what amino acids are being put there

Made by WebLogo application through design_analysis.py





<http://weblogo.berkeley.edu/>

Rosetta Protein Design applications

De Novo Design of a Novel Fold


Top7 “back-of-the envelope”
drawn topology not found in the
PDB at time of design

Iterative fixed backbone design +
backbone perturbations

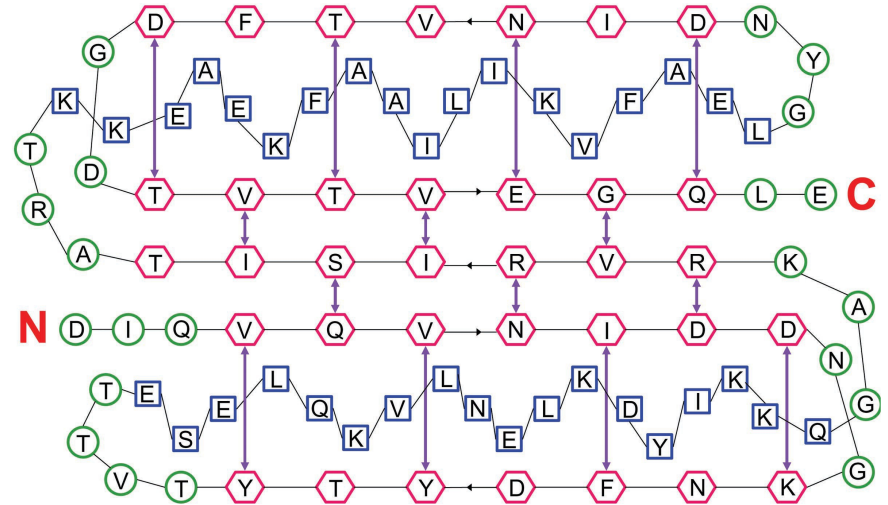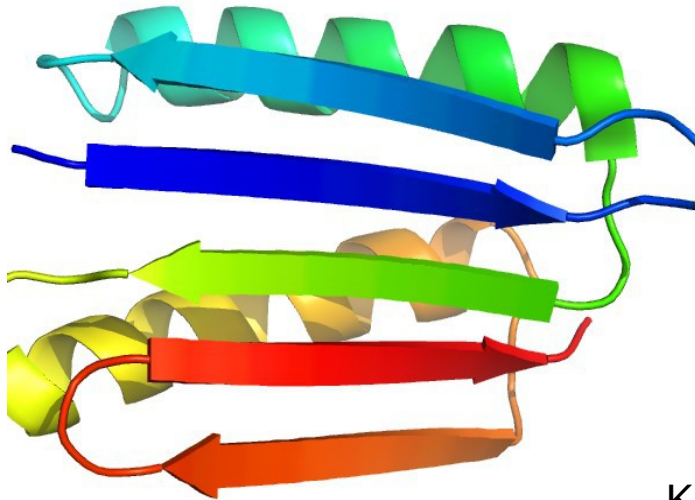

Kuhlman, B. *et al.* (2003). Design of a novel
globular protein fold with atomic-level accuracy.
Science 302, 1364–1368.

Atomic Level Accuracy of Design (blue) to X-ray structure (red)


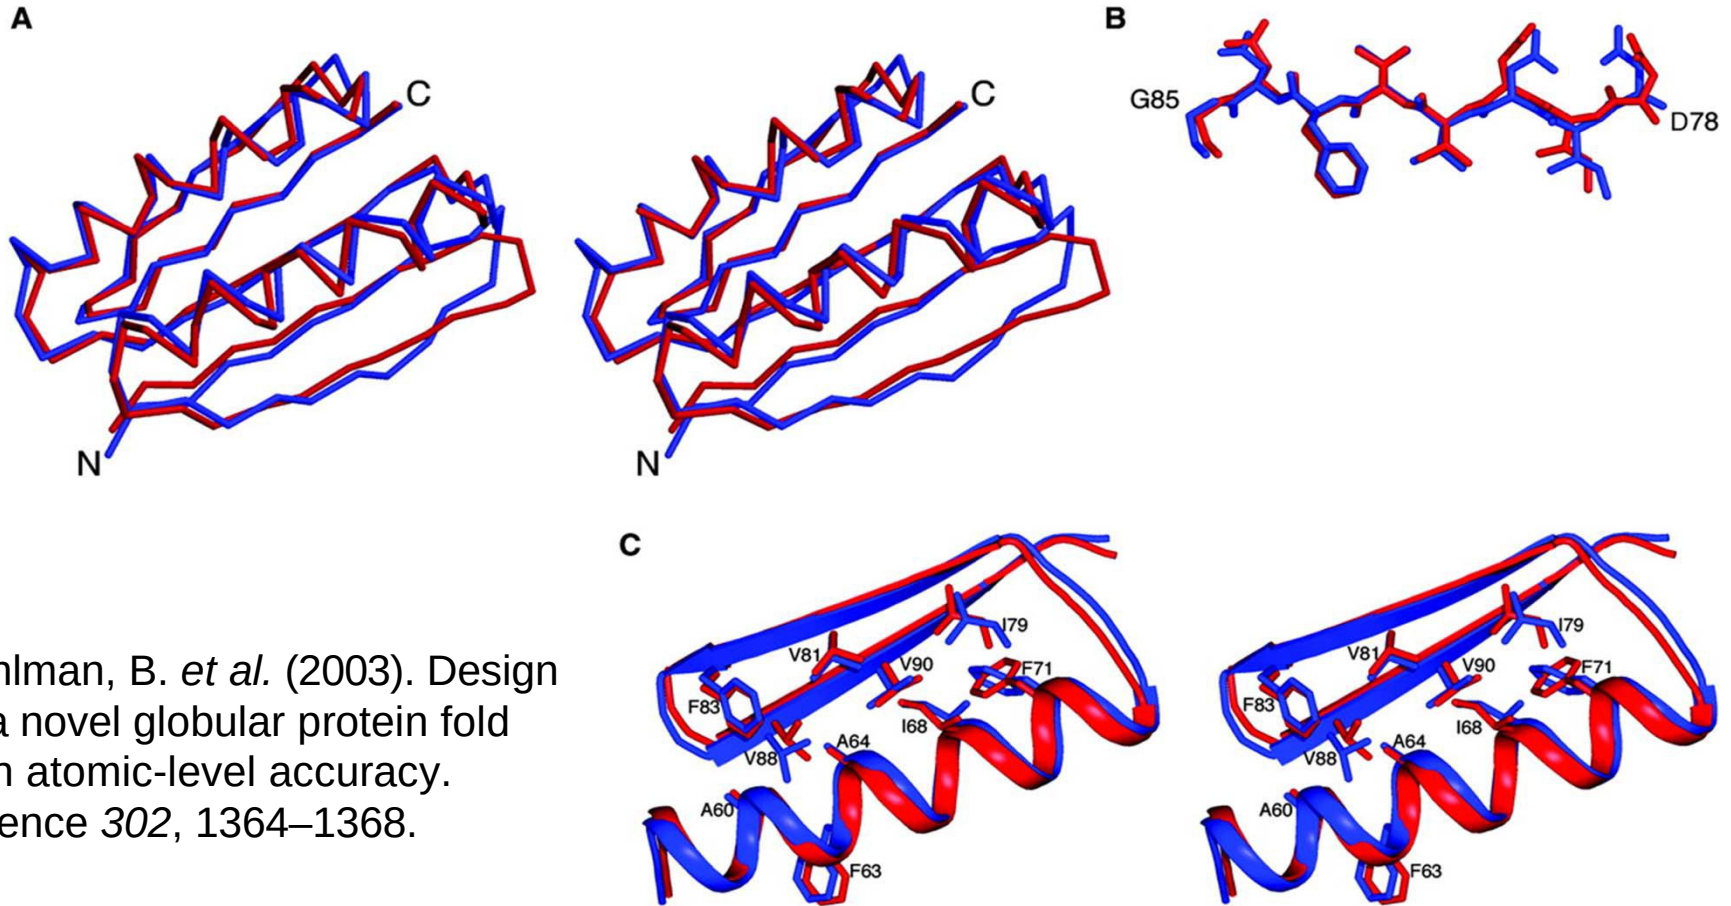


Kuhlman, B. *et al.* (2003). Design of a novel globular protein fold with atomic-level accuracy. *Science* 302, 1364–1368.


Design of epitope scaffolds

Extract a known neutralizing epitope from an antigen, place onto a scaffold protein

Fold a helix-loop-helix motif, redesign sequence to increase stability

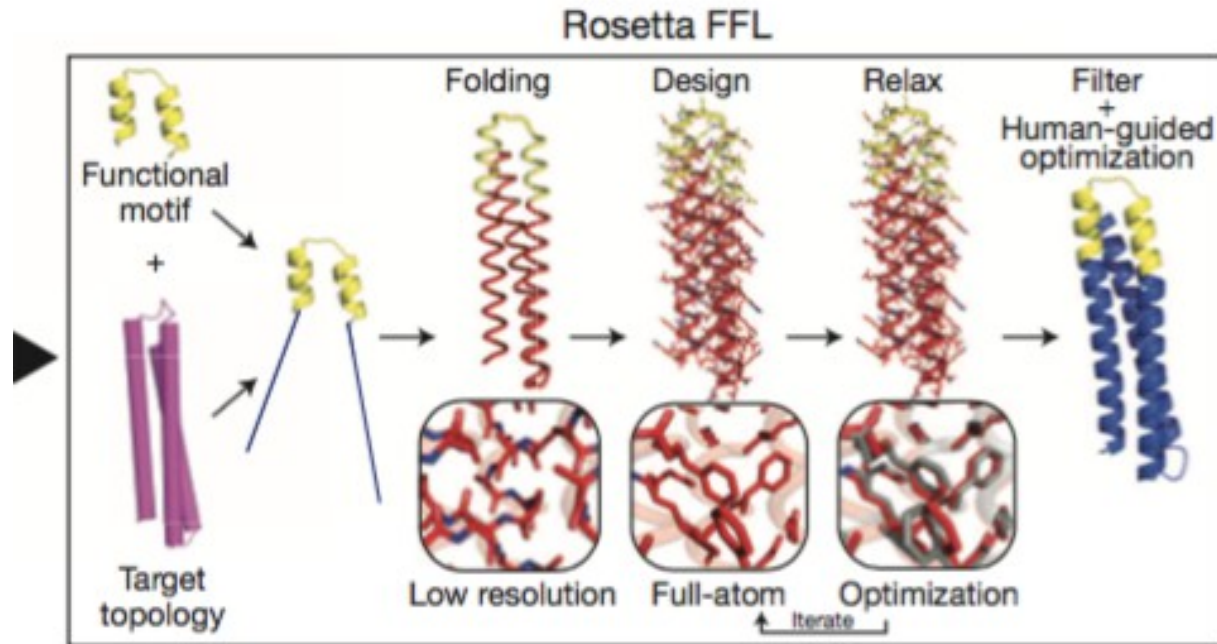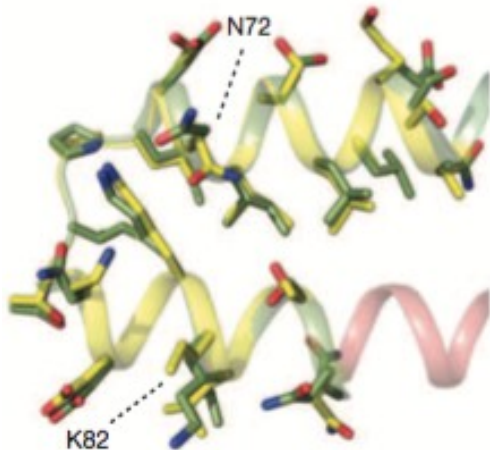

Redesign of HIV antibody with increased potency

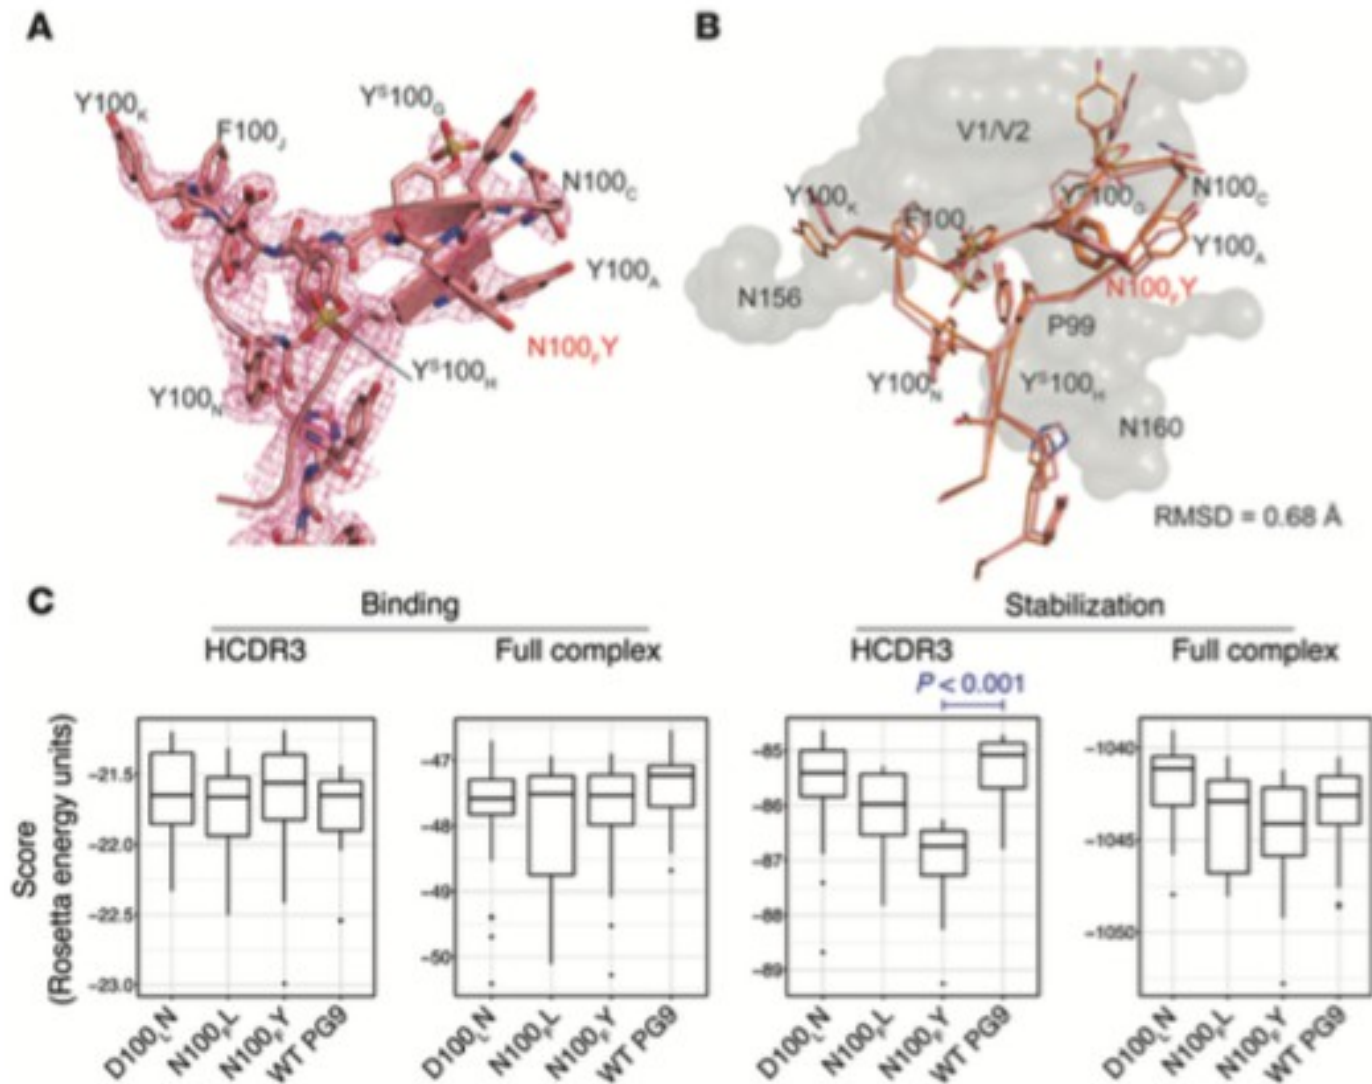

Willis, J. R. *et al.*
Redesigned HIV
antibodies
exhibit
enhanced
neutralizing
potency and
breadth. *J. Clin.*
Invest. **125**,
2523–2531
(2015).

Additional Design Applications

- Novel Enzyme Design – RosettaMatch and RosettaDesign**

Siegel, J.B. *et al.* (2010). Computational design of an enzyme catalyst for a stereoselective bimolecular Diels-Alder reaction. *Science* 329, 309–313

- Novel Protein Therapeutic Design**

Fleishman, S.J. *et al.* (2011). Computational design of proteins targeting the conserved stem region of influenza hemagglutinin. *Science* 332, 816–821.

- Design of a thermally stabilized enzyme**

Korkegian, A., Black, M.E., Baker, D., and Stoddard, B.L. (2005). Computational thermostabilization of an enzyme. *Science* 308, 857–860.

- Design of self-assembling proteins as nanomaterials**

King, N.P., Sheffler, W., Sawaya, M.R., Vollmar, B.S., Sumida, J.P., Andre, I., Gonen, T., Yeates, T.O., Baker, D. (2012). Computational Design of Self-Assembling Protein Nanomaterials with Atomic Level Accuracy. *Science* 336 1171-1174

Additional Design Applications

- Design of symmetric superfolds to understand protein folding evolution**

Fortenberry, C. *et al.* (2011). Exploring symmetry as an avenue to the computational design of large protein domains. *J. Am. Chem. Soc.* *133*, 18026–18029.

- Rational epitope design**

Wu, X., et al. (2010). Rational design of envelope identifies broadly neutralizing human monoclonal antibodies to HIV-1. *Science* *329*, 856– 861.

- Rational vaccine design**

Jardine, J., et al. (2013). Rational HIV Immunogen Design to Target Specific Germline B Cell Receptors. *Science*.